



VENTILATION GRILLE COMBINED WITH EXTRACT GRILLE

UMR
SERIES

OVERVIEW TECHNICAL CHARACTERISTICS

OVERVIEW AND CHARACTERISTICS :

Also the grilles UMR belong to the series UM. These units are composed by a double or single deflection grille with adjustable blades and an extract grille with fixed blades mounted on the same frame.


The grilles UMR are used in those applications, in which the supply and in-take actions are converged on the same opening. Using the type of grilles series UMR can help to avoid difficulties, waste of time and additional work during the installation.

The construction modality allows to meet all construction and size requirements of the customers.

For the characteristics please see pages of this catalogue referred to UM ventilation grilles and UR extract grilles.

CONSTRUCTIONS :

The possibilities of the construction make refer to all the various models of UM (double or single deflection with horizontal or vertical frontal line) and the position of the extract grille UR (high A, down B, right D, left S) on the ventilation grille. The dimensions of the two units (base x height / bases x height) give more detailed information which could be necessary for the construction.

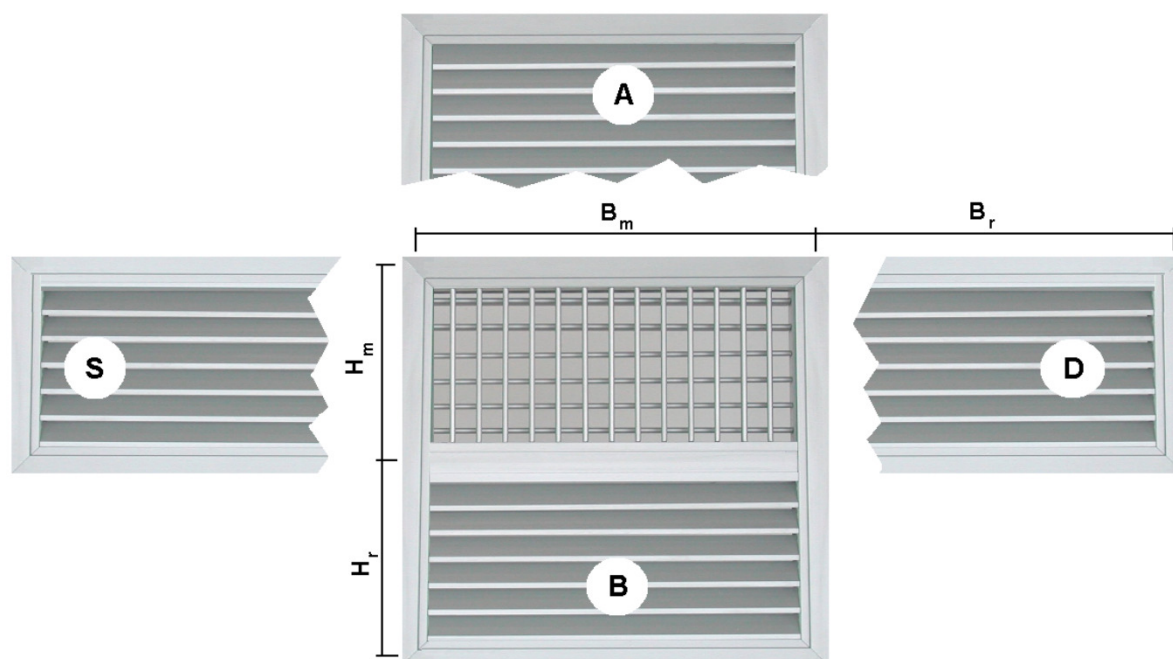

UM	Ventilation grille
1 / 2	1 / 2 blades line
V / H	Vertical / horizontal frontal line
R	Extract grille
A / B / D / S	Position of the extract grille
$B_m \times (H_m + H_r)$	Sizes for constructions A / B
$(B_m + B_r) \times H_m$	Sizes for constructions D / S

Example: UM 2V RD (300+500)x200
Double deflection grille- vertical frontal line- with extract grille on the right side. Nominal sizes of the ventilation grille 300x200, of the extract

